

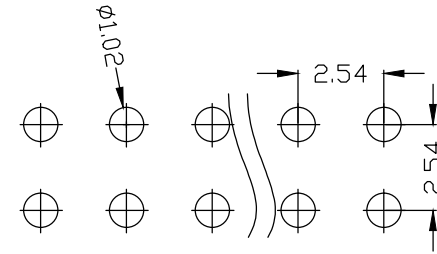
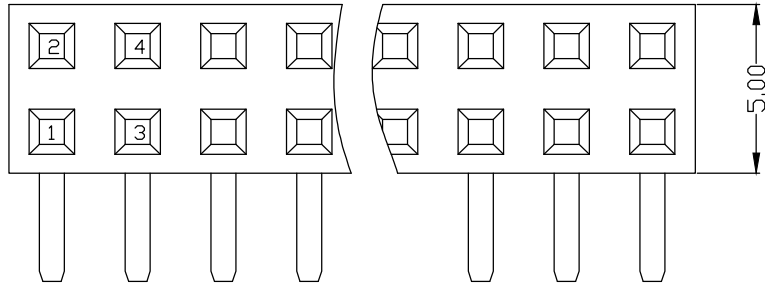


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

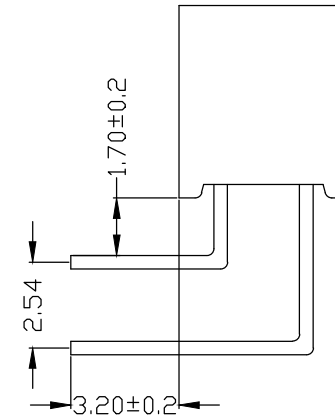

Recommended P.C.B. Layout

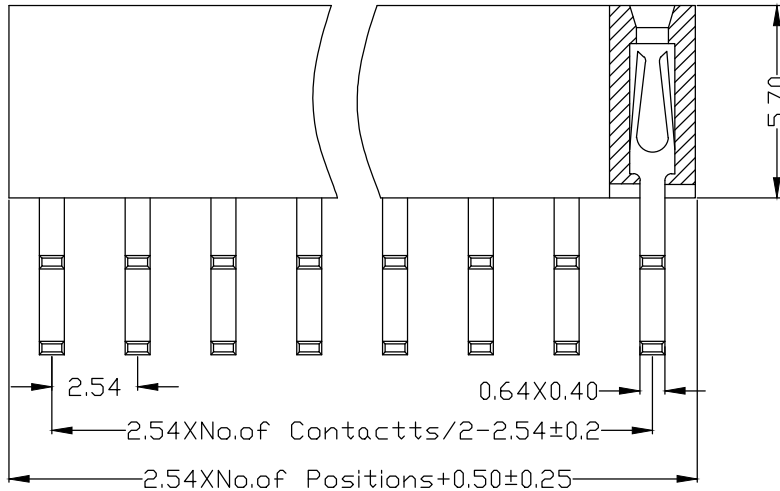

Std. Material

Contact: Brass
Contact Plating: 1u" Au over 30u" Ni Min.
Insulator: PA6T(UL94V-0).
Insulator Colour: Black

Temperature

Operating Temp.: -40℃ to 105℃
Max. Processing Temp.: 260℃ for 10s

Electronic Specifications

Current Rating : 3 AMP
Contact Resistance : 20mΩ Max.
Insulation Resisitance : 1000MΩ Min.
Withstanding Voltage : AC 1000V for 60s

Packing : Tray or agree on _____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 2 x 40	SN: Tin ☐ G0: 0.8u" Gold ☐ G1: 1u" Gold ☐ G2: 1.5u" Gold ☐ G3: 2u" Gold ☐ G4: 3u" Gold ☐ G5: __u" Gold ☐	A: PBT ☐ B: PA6T ☐ C: PA9T ☐ D: PA66 ☐ E: PA46 ☐ F: LCP ☐ G: _____ ☐
Ordering:(N) 2 X		

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:		ORIGINALLY BY
		DRAWN: FHY
ANGLEAR ±1°	LINEAR X 0.5	CHECKED: FY
	X.X ±0.2	APPROVED: FY
	X.XX ±0.1	DATE:2020.12.19

ZWON



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.

SERIES: FH2.54*5.7/Dual Row/Right Angle

TYPICAL MODEL: 2.54mm双排母 塑高5.7 90度 Y型

Drawing No.		DRXXX-XX	
Scale	Revision	Sheet	
FIT	A	1 of 1	
ZWON P/N:		Customer P/N:	